

# Spin Shear Joint

Customer Name: \_\_\_\_\_ Date: \_\_\_\_\_



Application Number: \_\_\_\_\_ Revision: \_\_\_\_\_

Project: \_\_\_\_\_

Material: \_\_\_\_\_

Prepared By: \_\_\_\_\_ Email: \_\_\_\_\_

	Dimension	General Guidelines	Recommended Size
W	Wall Thickness	Minimum 0.100"	
B	Shear Length	$1.5 \cdot S$	
A	Shear Width	0.016" – 0.030"	
D	Lead-in	0.020" – 0.050"	
S	Side Wall Width	Minimum 0.040"	
C	Clearance	0.005"	

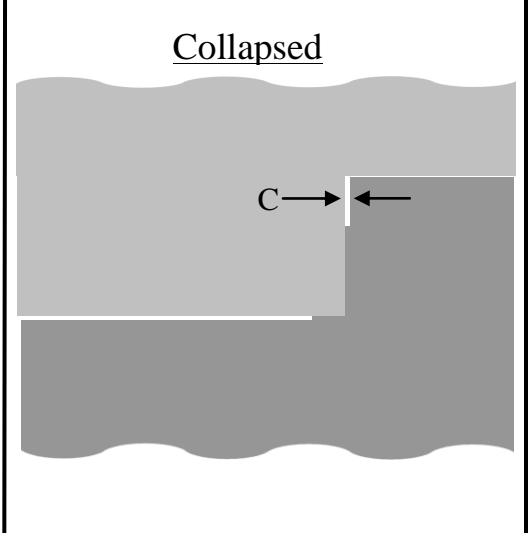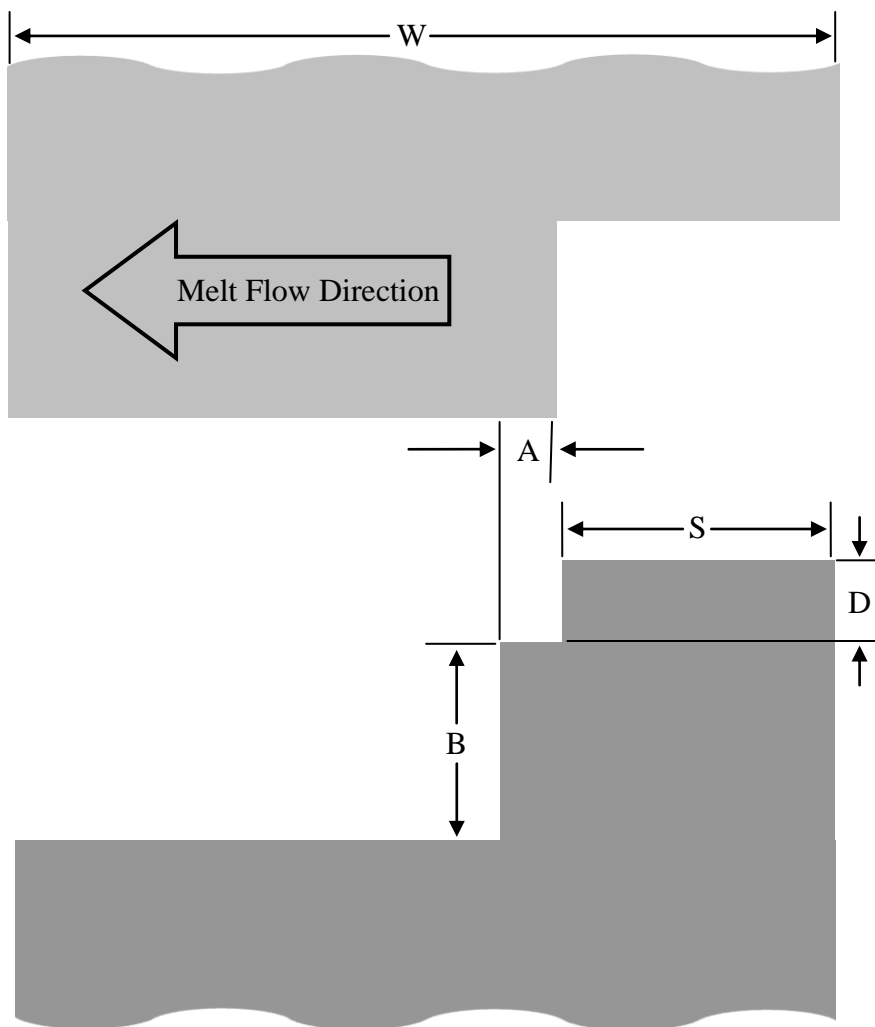

**Dukane Corporation**  
*Intelligent Assembly Solutions*

2900 Dukane Drive  
 St. Charles, IL 60174  
 (630) 797-4900

<http://www.dukcorp.com/us>  
[us\\_caddata@dukcorp.com](mailto:us_caddata@dukcorp.com)